

ALMACRAWLER MULTI-LOADER

CRAWLER CARRIER



3.0 BL



FULL ELECTRIC DRIVE



1800 025 024
monitor.net.au

MULTI LOADER 3.0 BL

FULL ELECTRIC DRIVE

Transport capacity 3000 kg

Full electric battery powered with electric drive

Self-levelling up to 20°

Radio remote controller

Capacità di trasporto 3000 kg

Alimentazione full-electric con pacco batterie e trazione elettrica

Autolivellante fino a 20°

Radiocomando



3T max
capacity
capacità massima

max
speed
velocità massima **4.2 km/h**

Autonomy Autonomia	Load / Portata			Max Speed Velocità max
	0 Kg	1.500 Kg	3.000 Kg	
ECO	~4.500 m	~3.800 m	~3.200 m	1,2 Km/h
STD	~4.200 m	~3.400 m	~2.700 m	1,8 Km/h
POW	~3.900 m	~3.000 m	~2.200 m	4,2 Km/h



Radio console by AUTEC
Console radio by AUTEC



ATS AUTOMATIC
TENSIONER
SYSTEM

ZERO MAINTENANCE

**DYNAMIC
LEVELLING**


20° LONGITUDINAL
14° LATERAL

Technical data	ELC	LTH	Dati tecnici	Features / Caratteristiche
Max Capacity	3000 kg		Portata	Radio remote control, provided with display & double battery Radiocomando, fornito con display e doppia batteria
Min Width	1.46 m		Larghezza minima	On board diagnostics Diagnostica interna
Max Width	1.64 m		Larghezza massima	12V auxiliary socket Presa ausiliaria 12V
Min height	0.74 m		Altezza minima	Three different driving modes: MAIN / ED-S / DC-S Tre diverse modalità di guida: MAIN / ED-S / DC-S
Length	2.40 m		Lunghezza	Three power management configurations: ECO / STD / POW Tre velocità di guida: ECO / STD / POW
Dynamic levelling	Yes/Si		Dynamic levelling	Automatic tilt alarm with speed reduction Allarme di inclinazione con riduzione automatica della velocità
Longitudinal levelling Front	20°		Livellamento longitudinale Anteriore	Auxiliary hydraulic sockets Prese idrauliche ausiliarie
Longitudinal levelling Rear	15°		Livellamento longitudinale Posteriore	
Lateral levelling	+/- 14°		Livellamento laterale	
Hydraulic commands	Proportionals		Comandi idraulici	
Direction-Control System	Yes/Si		Direction-Control System	
Easy-Drive System	Yes/Si		Easy-Drive System	
Control of inclination	Automatic		Controllo dell'inclinazione	
Gradeability	25°		Pendenza superabile	
Side slope	25°		Massima pendenza laterale	
Max speed	4.2 km/h		Velocità max	
Power of electric motors	2 x 5,3kW		Potenza motori elettrici	
Voltage	48 V		Voltaggio	
Battery Charger	N°1 65A-48V (110/220V)		Caricabatteria	
Battery pack	Lead Crystal n°8 180Ah 48V	210Ah - 48V	Pacco batteria	
Recharging time	3,5h - 65A	3,5h - 65A	Tempo di ricarica	
Ingress Protection IP	IP67		Grado di protezione IP	
Controller	Remote radio control Radiocomando		Console	
Total weight	1900 kg	1750 kg	Peso totale	

Optional

- Non-marking tracks**
Cingoli anti-traccia




Kits and options

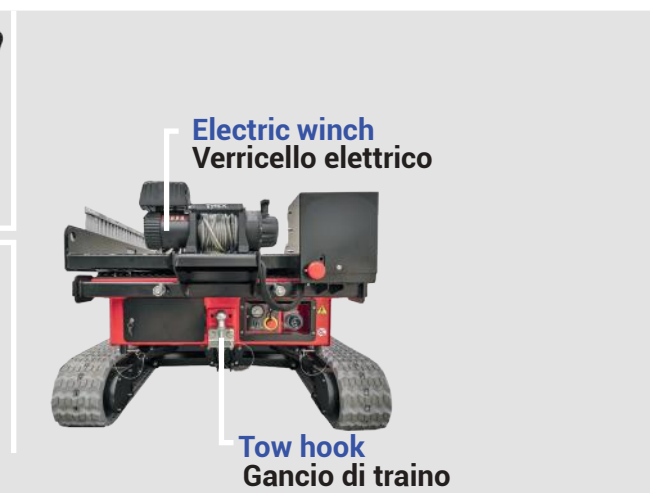

ALMACRAWLER

MULTI LOADER 3.0 BL

DIMENSIONS MISURE

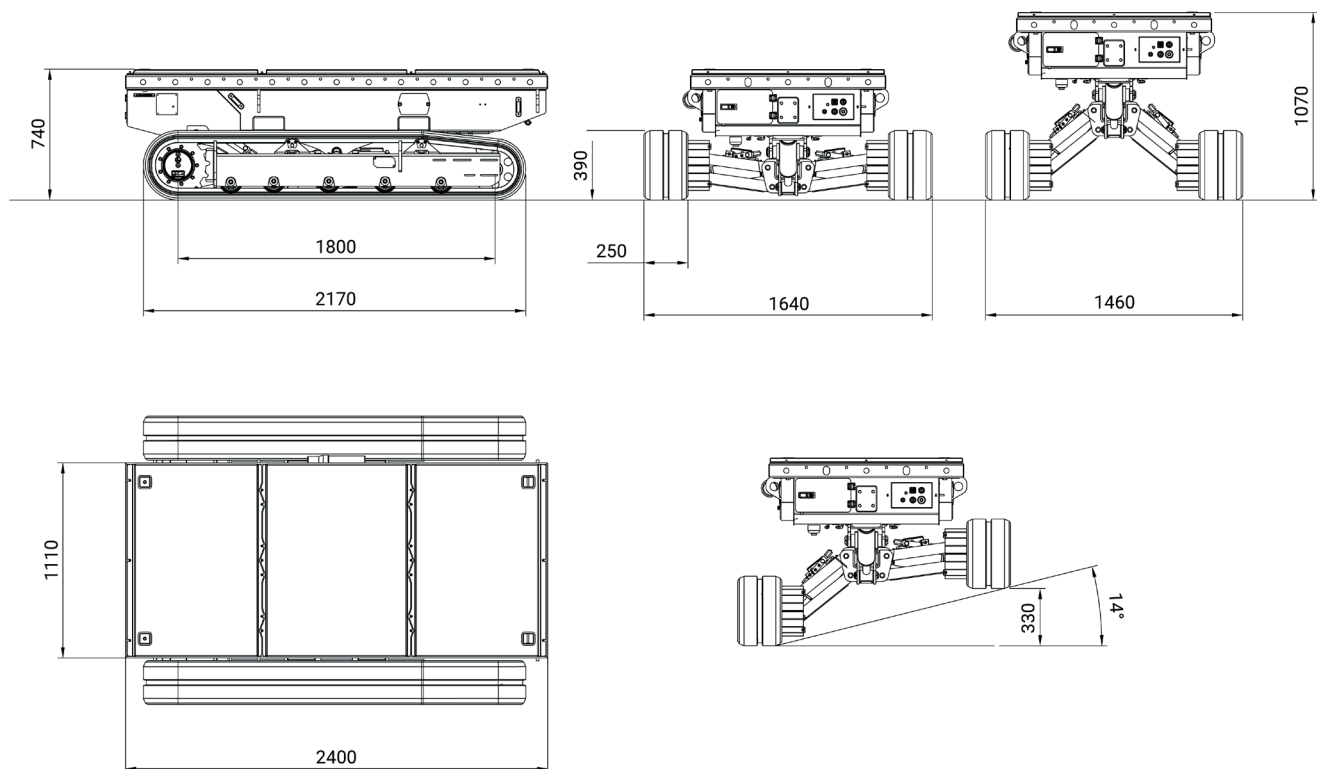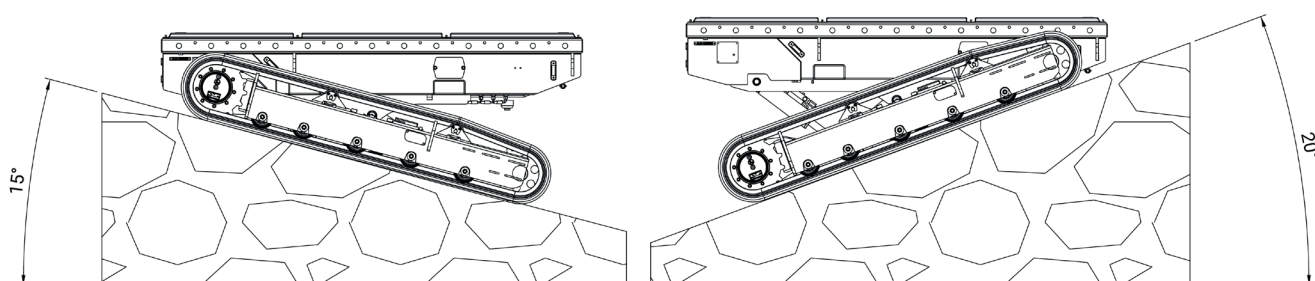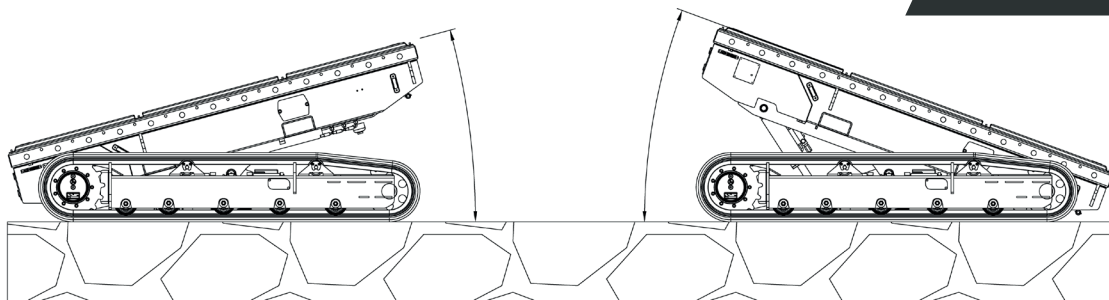

Almac Pacific
Level 10, 68 Pitt Street, Sydney, NSW2000

info@almac-pacific.com.au
www.almac-pacific.com.au

ALMACRAWLER 
ALMAC-PACIFIC.COM.AU

ALL DATA REPORTED IN THIS CATALOGUE ARE NOT BINDING. ALMAC SRL RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE.